

# Instruction Manual

## CVS 7970 High-Low Pressure Sensor

### Introduction

This instruction manual includes the following information for CVS 7970 High-Low Pressure Pilot:

1. Description
2. Piston Arrangement Changeover Instructions
3. Parts Information

Only persons qualified through training or experience should install, operate and service this equipment. If you have any questions regarding this product or this manual, please contact your CVS Controls Sales Representative before proceeding.

### Description

The CVS 7970 is a versatile sensor that can be programmed to detect and react to either increasing pressure or decreasing pressure with an adjustable range of 10 to 10,000 PSI (.689 to 689.5 Bar).

When used within standard safety systems, a pressure sensor monitors a specific media or process pressure source for changes to the normal operating range. Loss of pressure within the control circuit will begin a shutdown sequence or trigger an alarm, and pressure sensors can also indirectly operate on/off flow

control valves or pneumatic driven pumps. The CVS 7970 is a two position, three-way pilot with universal port (H, O, L), automatic reset (spring return) and pressure balance spool.

Each CVS 7970 is a self-contained unit containing necessary components for four different piston arrangements. Changeover instructions and drawings are included in this manual. Parts which are not installed in your current piston arrangement are kept in an enclosed storage tube. Machined within the piston housing of the CVS 7970 is a convenient 1/8"-27 NPT Female process connection and 1/2" NPT Male process connection.



Figure 1: CVS 7970 High/Low Pressure Sensor

9732 - 54 Avenue  
Edmonton, Alberta, Canada  
T6E 0A9  
Office: (780) 437-3055  
Fax: (780) 436-5461

**CVS**  
Controls Ltd.

Website: [www.cvs-controls.com](http://www.cvs-controls.com) E-Mail: [info@cvs-controls.com](mailto:info@cvs-controls.com)

205, 2323 - 32 Avenue NE  
Calgary, Alberta, Canada  
T2E 6Z3  
Office: (403) 250-1416  
Fax: (403) 291-9487

Table 1: CVS 7970 Specifications

Specifications		Dimensions
<b>Dimensions</b>		1.750" diameter x 8.0" length
<b>Working Pressure</b>	Process Pressure Inlet	10,000 PSI Maximum (689.5 Bar)
	Control Parts	125 PSI Maximum (8.62 Bar)
<b>Connections</b>	Process Pressure Inlet	1/2"-14 NPT M and 1/8"-27 NPT F
	Control Ports	1/4"-18 NPT F
<b>Weight</b>		3.5 lbs / 1.6 kg
<b>Panel Hole Cutout Size</b>		1 5/8" (39.81 mm)

One particular advantage of the CVS 7970 is its adjustment range capability. Because of the complete supplied components, there is no need to purchase and store additional sets of matching piston and spring components. The installation or reorientation of the existing piston components allows for an adjustment range capability of 10 to 10,000 PSI. This is especially convenient for remote facilities which require changes to pressure settings to match changes in process conditions.

## Piston Arrangement Changeover Instructions


When your CVS 7970 High/Low Pressure Sensor is shipped, it is set with your specified piston arrangement and pressure setting. When it becomes necessary to adjust pressure setting to that which is out of range of the current piston arrangement, make use of the additional components stored in a tube within the piston housing.

The information in this manual, including the parts listings and piston detail drawings, will assist you in completing the Piston Arrangement Changeover.

**Caution:** Consult and follow the established safety procedures of your facility prior to beginning disassembly of any CVS Controls product. Ensure that all pressure is exhausted from the system prior to performing any service work. Failure to remove the pressure from the system can result in serious personal injury.

1. Isolate and depressurize the control system.
2. Disconnect the control circuit instrumentation tubing from control valve, as well as the monitored process connection from the piston housing.
3. Where possible, remove the CVS 7970 from the service location to perform the changeover in a clean work environment.
4. Loosen the lock nut and remove from the adjusting cap. (See figure 2)
5. Gently relieve all spring tension by fully unscrewing the adjusting cap. This allows access to the storage tube.
6. Unscrew the piston housing from the valve body.
7. Turn the piston housing upside down and tap it gently on a flat, clean surface to remove the piston arrangement. The pistons should slide out easily.
8. Thoroughly clean the piston components, including the piston housing and internal bores, using warm water and a liquid detergent. Do not use abrasive tools or acidic cleansers. Dry all components with a cloth or paper towel.
9. Lightly lubricate all components and seals, and assemble the piston arrangement as desired according to the enclosed detail drawing.
10. When inserting the new piston arrangement into the piston housing, apply even pressure. Press evenly using both thumbs on the piston's outer edges for the insertion of the 1-1/8", 1/2" and 3/16" piston arrangements.
11. For the 1/4" piston insertion, install the 1/4" piston first, using a needle-nosed pliers. Then press the other piston components into place.

12. Lightly lubricate the threads of the piston housing, body and spring housing. Be sure to use a grease or medium appropriate for stainless steel.
13. Reassemble the pressure sensor.
14. Adjust the pressure setting to the required amount, and function test the pressure sensor. When the desired setting is achieved, tighten the lock nut securely against the adjusting cap.
15. Connect the instrumentation tubing and the pressure connection to the monitored process.
16. Introduce pressure to the pressure sensor's control circuit and monitored process inlet. Resume normal operation.

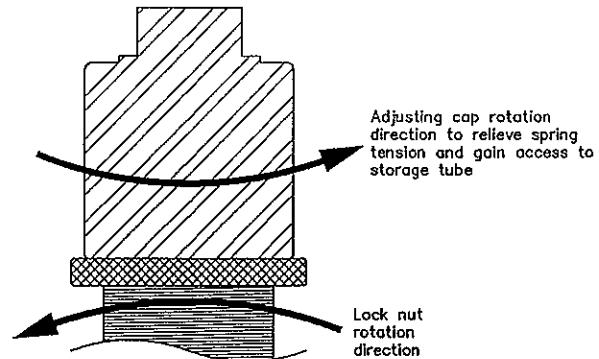




## CVS 7970 High-Low Pressure Sensor

Table 2: Parts List

1	CVS79710A	1	Adjusting Cap	Black Delrin
2	CVS79702A	1	5/16" Ball Bearing	Stainless Steel
3	CVS7911A	1	Spring Guide	Black Delrin
4	CVS7970A	1	Spring	302 Stainless Steel
5	CVS79712A	2	Lock Nut	Black Delrin
6	CVS79709A	1	Spring Housing	316 Stainless Steel
7	CVS79708	1	Stop Plate	316 Stainless Steel
8	CVS79704A	1	Body Housing	316 Stainless Steel
9	CVS79707A	1	Upper Stem	316 Stainless Steel
10	CVS79706A	1	Lower Stem	316 Stainless Steel
11	CVS79703A	1	Small Piston	316 Stainless Steel
12	CVS79705	1	Stop Washer	316 Stainless Steel
13	CS79702	1	Large Piston	316 Stainless Steel
14	CVS797014	1	Snap Ring	304 Stainless Steel
15	CVS79701A	1	Piston Housing	316 Stainless Steel
16	V-75-010	2	O-Ring	Viton
17	V-75-008	2	O-Ring	Viton
18	V-75-119	1	O-Ring	Viton
19	TFE-008	1	Back-Up Ring	Teflon
20	V-75-008	1	O-Ring	Viton
21	CVS79713A	1	1/4" Piston	316 Stainless Steel
22	V-75-006	1	O-Ring	Viton
23	TFE-006	1	Back-Up Ring	Teflon
24	TFE-012	1	Back-Up Ring	Teflon
25	V-75-012	1	O-Ring	Viton

### O-Ring Kits


CS7970-BKK	1	Piston O-Ring Kit (Body Housing)	
V-75-008	1	O-Ring	Viton
V-75-010	1	O-Ring	Viton
CVS7970-Pkk	1	Piston O-Ring Kit (Body Housing)	
V-75-006	1	O-Ring	Viton
V-75-008	1	O-Ring	Viton
V-75-012	1	O-Ring	Viton
V-75-119	1	O-Ring	Viton
TFE-006	1	Back-Up Ring	Teflon
TFE-008	1	Back-Up Ring	Teflon
TFE-012	1	Back-Up Ring	Teflon

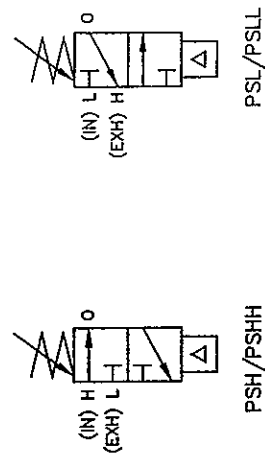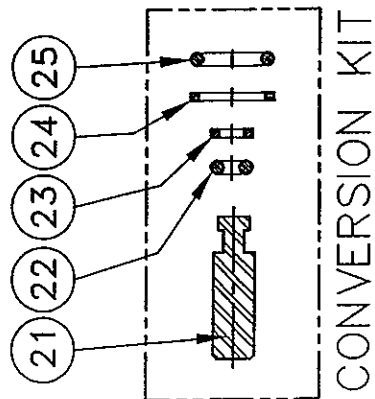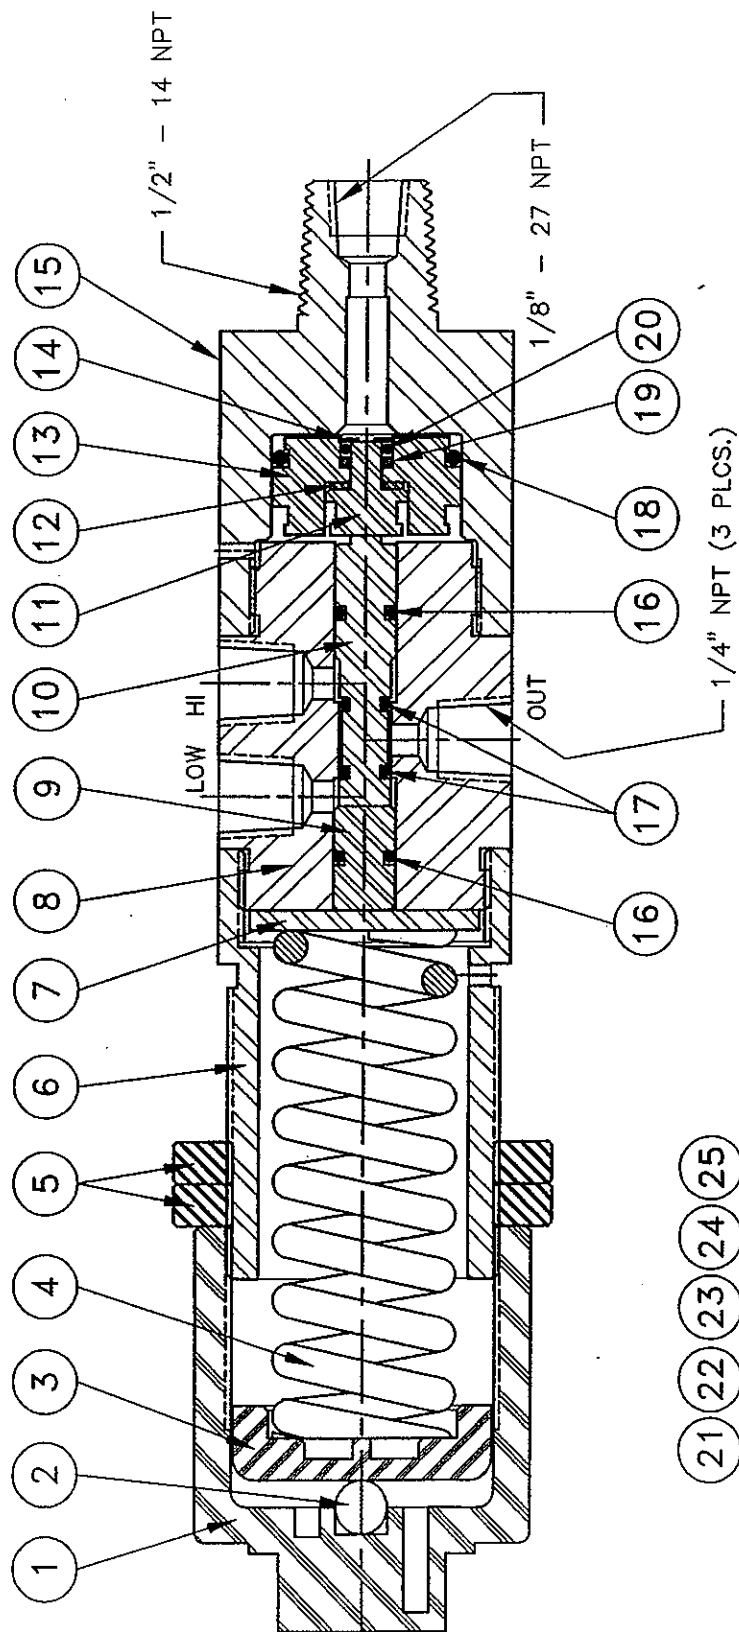

## 3/16 Piston Arrangement

### Enlarged Detail Drawing

For pressures from 5900 to 10,000 PSI  
(406.8 to 689.5 Bar)

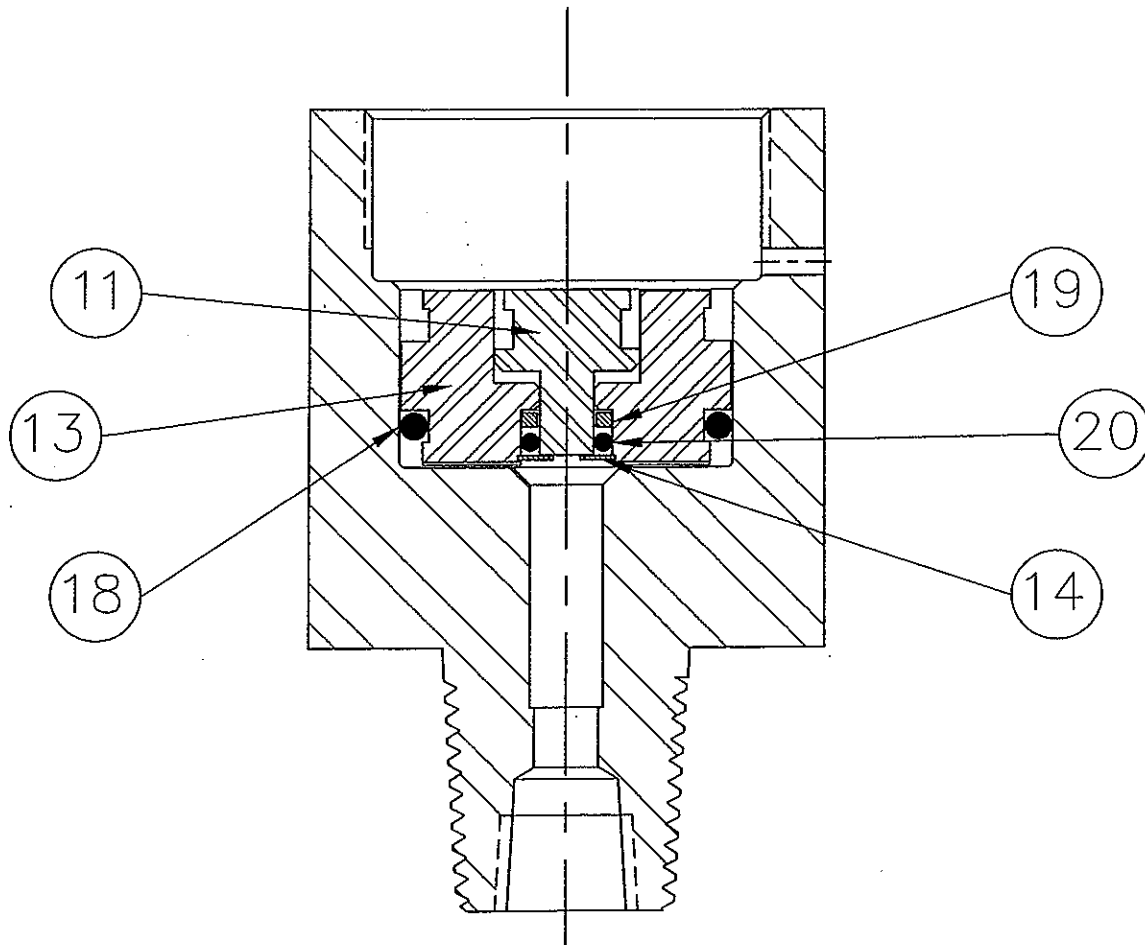


11	CVS79703A	1	Small Piston	316 Stainless Steel
13	CS79702	1	Large Piston	316 Stainless Steel
14	CVS797014	1	Snap Ring	304 Stainless Steel
18	V-75-119	1	O-Ring	Viton
19	TFE-008	1	Back-Up Ring	Teflon
20	V-75-008	1	O-Ring	Viton

## 1/4" Piston Arrangement

### Enlarged Detail Drawing

For pressures from 1440 to 5900 PSI  
(99.28 to 406.8 Bar)

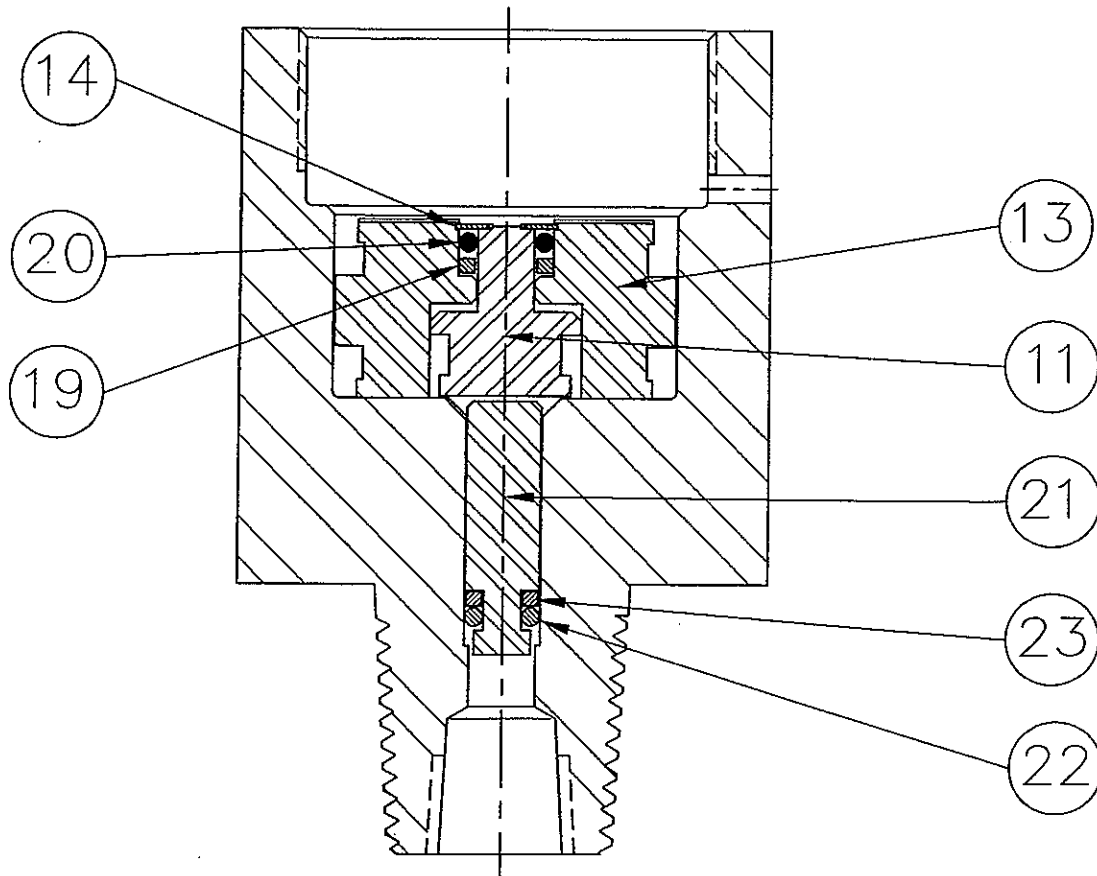


11	CVS79703A	1	Small Piston	316 Stainless Steel
13	CS79702	1	Large Piston	316 Stainless Steel
14	CVS797014	1	Snap Ring	304 Stainless Steel
19	TFE-008	1	Back-Up Ring	Teflon
20	V-75-008	1	O-Ring	Viton
21	CVS79713A	1	1/4" Piston	316 Stainless Steel
22	V-75-006	1	O-Ring	Viton
23	TFE-006	1	Back-Up Ring	Teflon

# 1-1/8" Piston Arrangement

## Enlarged Detail Drawing

For pressures from 10 to 290 PSI  
(.689 to 20 Bar)

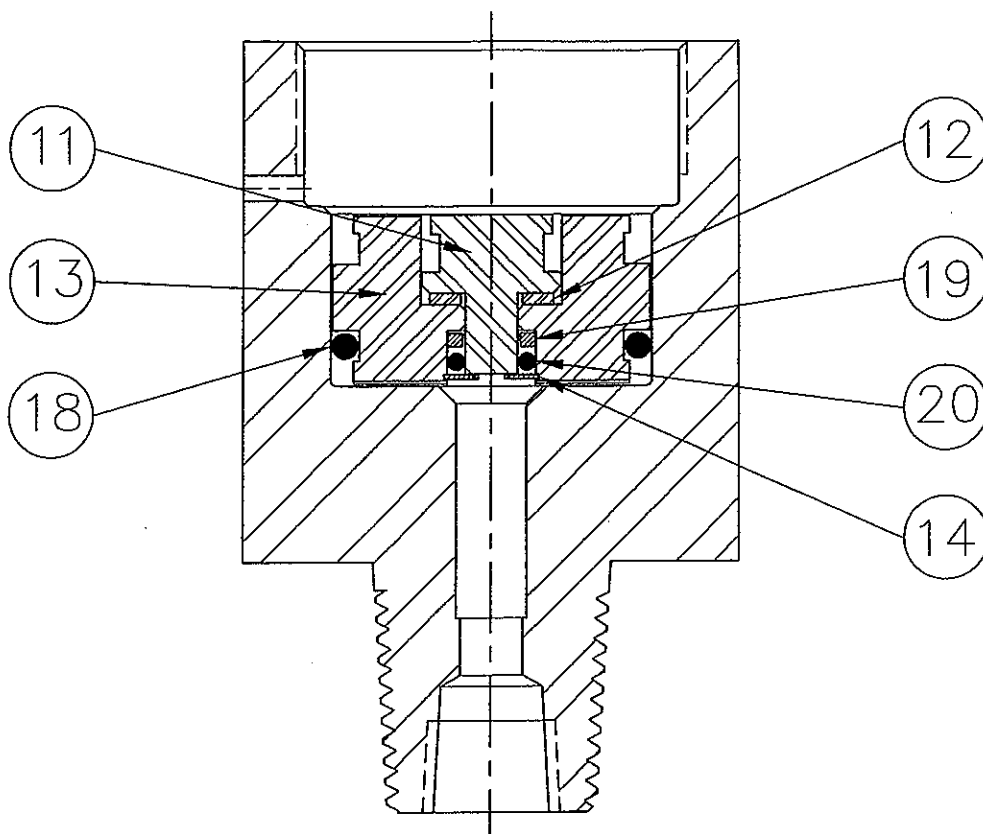


11	CVS79703A	1	Small Piston	316 Stainless Steel
12	CVS79705	1	Stop Washer	316 Stainless Steel
13	CS79702	1	Large Piston	316 Stainless Steel
14	CVS797014	1	Snap Ring	304 Stainless Steel
18	V-75-119	1	O-Ring	Viton
19	TFE-008	1	Back-Up Ring	Teflon
20	V-75-008	1	O-Ring	Viton

## 1/2" Piston Arrangement

### Enlarged Detail Drawing


For pressures from 290 to 1440 PSI  
(20 to 99.28 Bar)

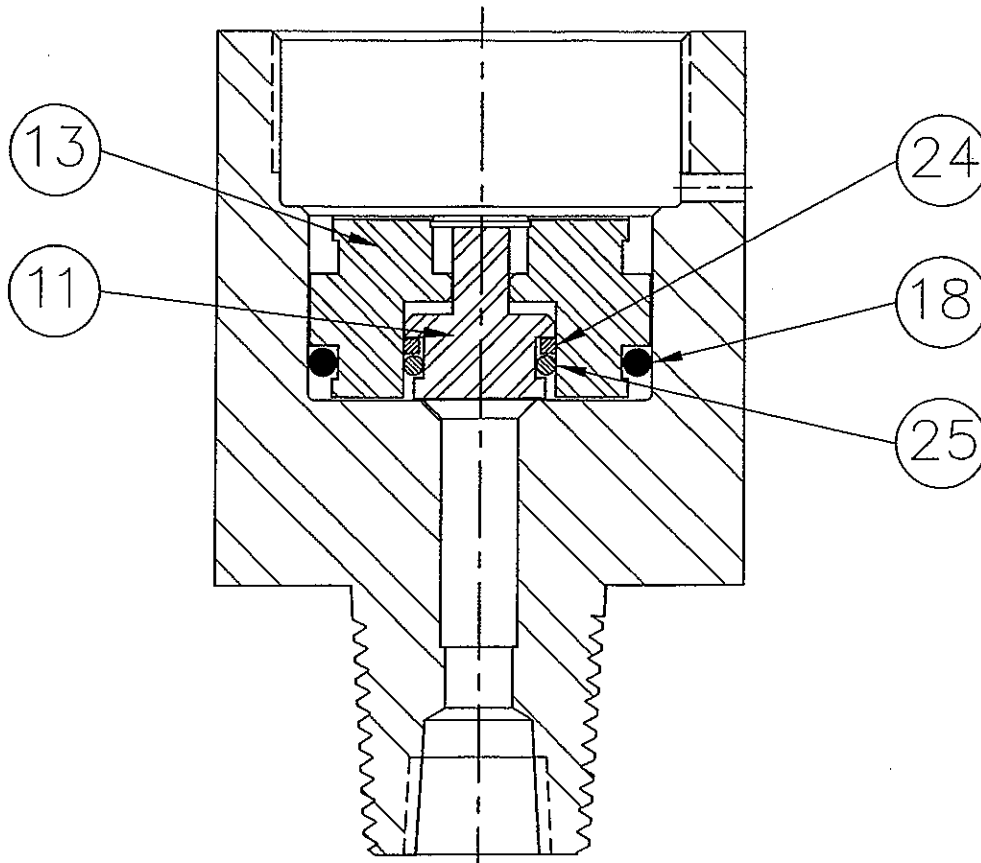

11	CVS79703A	1	Small Piston	316 Stainless Steel
13	CS79702	1	Large Piston	316 Stainless Steel
18	V-75-119	1	O-Ring	Viton
24	TFE-012	1	Back-Up Ring	Teflon
25	V-75-012	1	O-Ring	Viton

Printed in Canada



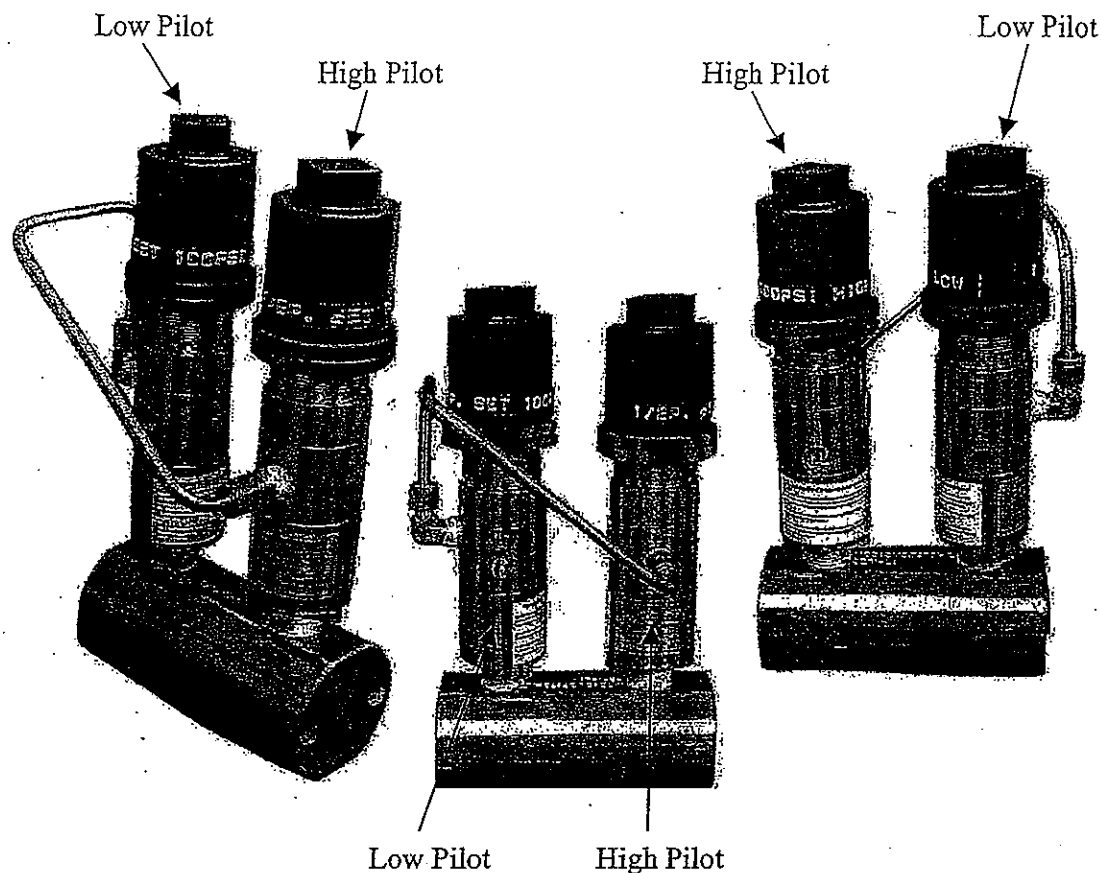

## 7970 Hi and Lo Pilot Pressure Switch

### Low Pressure Valve:

\*Out Port      —————> To Valve  
 \*Hi Port        —————> To Vent

### High Pressure Valve:

\*Hi Port        —————> To (air/gas) Supply (Max Supply Pressure 125 psi)  
 \*Lo Port        —————> To Vent

### Manifold:

\*Either port for process

9732-54 Avenue  
 Edmonton, Alta, Canada, T6E-0A9  
 Bus: (780) 437-3055  
 Fax: (780) 436-5461

**CVS Controls Ltd.**

E-mail: [info@cvcs-controls.com](mailto:info@cvcs-controls.com)

Website: [www.cvs-controls.com](http://www.cvs-controls.com)

Suite 205, 2323-32 Ave NE  
 Calgary, Alta, Canada, T2E-6Z3  
 Bus: (403) 250-1416  
 Fax: (403) 291-9487

